


## BNC FEMALE TO FEMALE BULKHEAD ADAPTOR (SRFS-BNCFFBH-02)

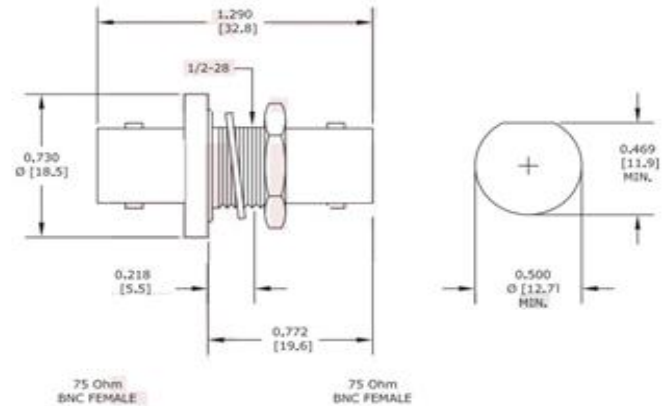

Electrical & Mechanical Specifications		
Characteristics Impedance	50 ohm	
Frequency Range	DC-2GHz	
VSWR	1.2:1	
Dielectric Withstanding Voltage	≥1500V RMS,50Hz at sea level	
Working Voltage	1000Vrms,50 Hz at sea level	
Insertion Loss	0.20 dB	
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
<b>Material</b>		
	<b>Material</b>	<b>Plating</b>
Body	Brass	Ni
Contact	Brass	Ag
Insulator	PTFE	-
Outer Contact	Brass	Ni
<b>Mechanical Specifications</b>		
Temperature Range	-65°C~+165°C	
RoHS Compliant	Yes	