

## 550-2700MHz Low Pim N Female 15dB Directional Coupler

### Product Description:

550-2700MHz Low Pim N Female 15dB Directional Coupler

550-2700MHZ N Female 5dB 6dB 7dB 10dB 15dB 20dB RF Air Dielectric DAS IBS Directional Coupler

.P/N Model:VN-DC-05527-ON5 (5dB Coupler...)


.For DAS IBS Application

.Coupling Degree: Can Be Customized

.Low PIM : Up To -165dbc @ 43dBm\*2

.Installation: Screw Or With Brakets

.For DAS IBS Application

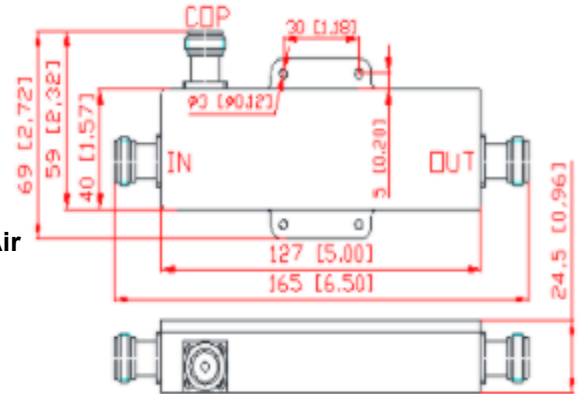

### Mechanical & Electrical Specifications


Part Number	SRFS-DC-05527-ONx					
Operating Frequency ( MHz )	550-2700					
Impedance ( Ohm )	50					
VSWR	≤1.25					
Coupling (dB)	5 ± 0.9	6 ± 0.9	7 ± 0.9	10 ± 1.1	15 ± 1.5	20 ± 1.5
Insertion Loss (dB)	≤2.2	≤1.7	≤1.3	≤0.8	≤0.4	≤0.2
Isolation (dB)	≥25	≥26	≥27	≥30	≥35	≥40
IM3 (dBc @ 2x43dBm)	-153 / -163					
Application	Indoor/Outdoor					
Degree of Protection	IP65					
Operating Temperature ( °C )	-40 ~ + 80					
Interface	N Female					
Handling Power (Watt, max)	300					
Peak Power (Watt, max)	1200					
Dimension (mm)	127 × 40× 24.5( excludes connector)					
Net Weight (g)	350± 20					
Packing Dimensions (mm )	180 × 75 × 30					
Packing Carton Size (mm )	400 × 380 × 170					
ROHS Compliance	Yes					

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

## 550-2700MHz Low Pim N Female 15dB Directional Coupler

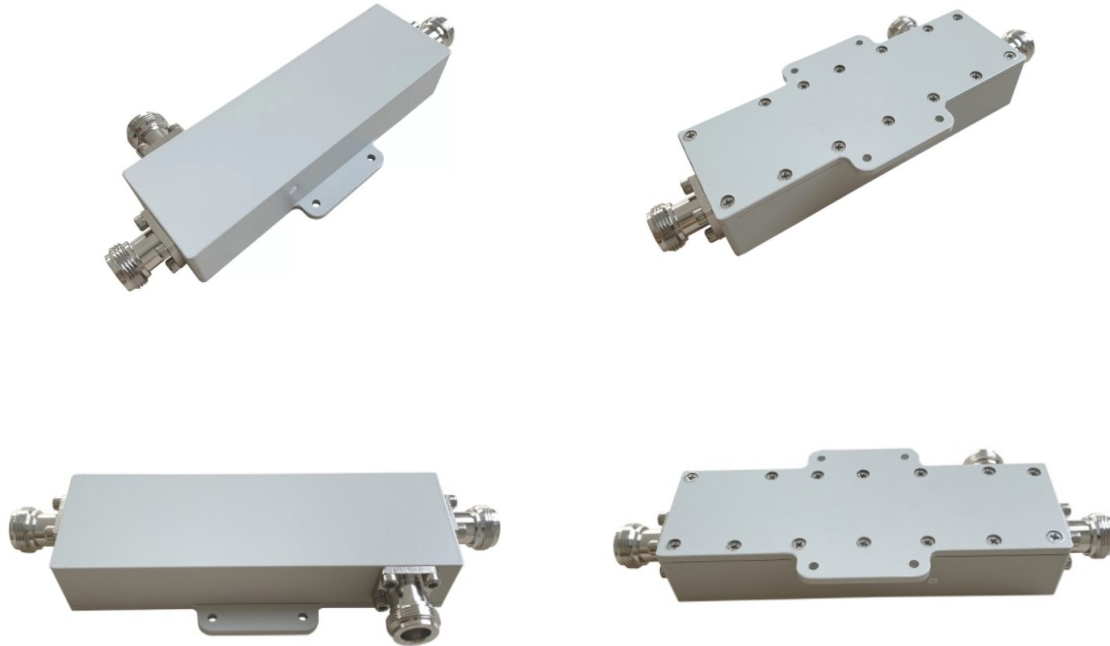

**Directional couplers** are a passive device used mostly in the field of radio technology. They couple a defined amount of the electromagnetic power in a transmission line to a port enabling the signal to be used in another radio system or next radio equipment. An essential feature of directional couplers is that they only couple power flowing in one direction. Power entering the output port is coupled to the isolated port but not to the coupled port. A directional coupler designed to split power equally between two ports is called a **hybrid coupler**, for example ,3dB hybrid coupler.

SRFS directional coupler are based on different design ,such as micro-stripline, air-dielectric ,thin film ,waveguide etc.

Directional couplers have many applications. These include providing a signal sample for measurement or monitoring, feedback, combining feeds to and from antennas, providing signal taps for cable and/or Distributed Antenna Systems such as cable TV, mobile signal coverage and separating transmitted and received signals on telecom systems.