# SRFS TELEINFRA

Get connected with us:

## Band Pass Filter 1705~1840MHz

| Electrical & Mechanical Specifications | |
|---|---|
| Center Frequency | 1772.5MHz |
| Frequency Range | 1705~1840MHz |
| Insertion Loss in BW | 1.0 max. |
| Return Loss | 18.0 min. |
| Rejection | 60 min. @ 1030~1090 MHz<br>60 min. @ 2800~3000 MHz |
| PIMD | -156 min.@2x43dBm<br>Measured at 1770MHz (1805MHz and 1840MHz) |
| Power handling | 100 max. |
| Impedance | 50 |
| Operation Temperature | -40 ~ +85 |
| Connector | IN: 7/16 DIN Male, OUT: 7/16 DIN Female |
| Environment Condition | IP67 |
| Finish | Black Epoxy Painting |

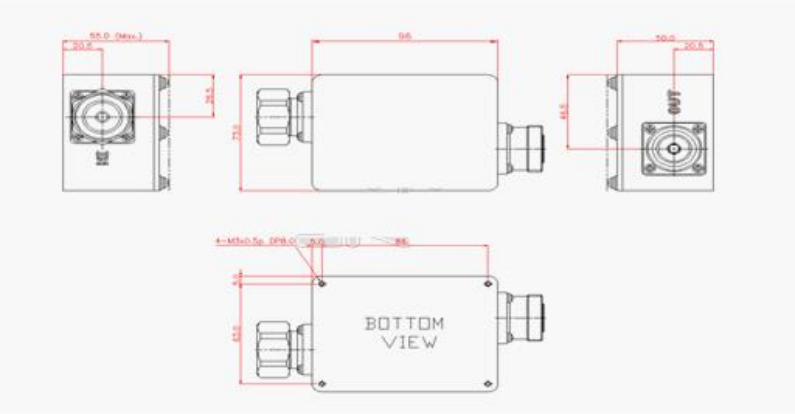


Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam nagar new delhi-110059
+91-8435474330, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, srfsteleinfra@gmail.com
www.srfsteleinfra.in, www.srfsteleinfra.com