


BMA FEMALE EDGE LAUNCH CONNECTOR

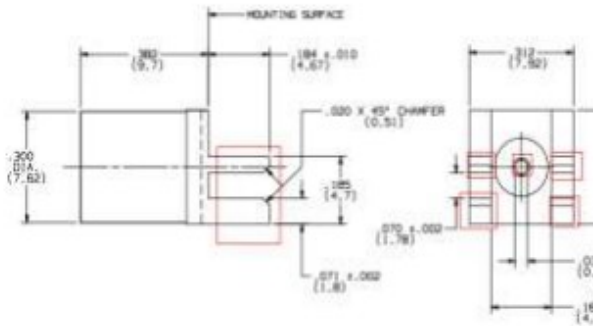

Electrical & Mechanical Specifications		
Characteristics Impedance	50 Ω	
Frequency	18 GHz	
VSWR	1.02 + .008 f	
Insertion Loss	.03 vf	
Shielding Effectiveness	≥-90 dB	
Insertion Force	3.0 lbs	
Dielectric Withstanding Voltage	1000 Vrms max. at sea level	
Withdrawal Force	1.5 lbs	
Material & Plating		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center Conductor	Beryllium Copper	Au
Gasket	Fluorocarbon Rubber	-
Lock Washer	Phosphor Bronze	-
Environmental		
Temperature Range	-65°C~+165°C	
RoHS	Compliant Yes	