


Outdoor 50 Watts DC-4GHz 50 Ohm N Type

Product Description:

Outdoor 50 Watts DC-4GHz 50 Ohm N Type Attenuator

DC-3.8GHz 50 Watts 4.3-10 Male-4.3-10 Female 3~30dB RF Coaxial Attenuators

RF attenuators usually can be used to reduce the power of the signal within many RF circuit designs and RF systems. These RF attenuators can be fixed, switched, surface mounted or even continuously variable.

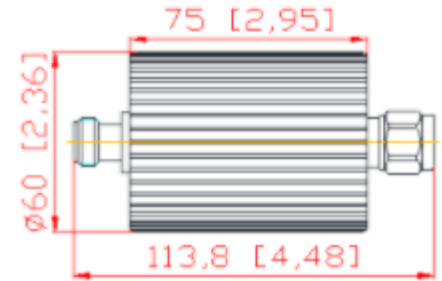

Mechanical & Electrical Specifications

Mechanical & Electrical Specifications							
Part Number	SRFS-AT-3.8G-50W-OPX						
Operating Frequency (MHz)	DC-3800						
Impedance (Ohm)	50						
VSWR	≤1.25						
Application	Indoor & Outdoor						
Degree of Protection	IP65						
Handling Power (Watt, max)	50						
Interface	4.3-10 Male – 4.3-10 Female						
Operating Temperature (°C)	-40 ~ + 80						
Attenuation(dB)	3	5	6	10	15	20	30
Attenuation Tolerance(dB)	±0.5	±0.5	±0.6	±0.8	±1	±1.5	±1.8
Dimension (mm)(L×W×H, excl connector)	75×Φ60						
Net Weight (g)	360± 20						
Packing Dimensions (mm,L×W×H)	170 × 70 ×70						
Packing Carton Size (mm,L×W×H)	370 × 370 × 180						
ROHS Compliance	Yes						

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



Outdoor 50 Watts DC-4GHz 50 Ohm N Type Attenuator



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in