


SRFS TELEINFRA



CRC9 RIGHT ANGLE CONNECTOR FOR LMR 100, RG 174, RG 316

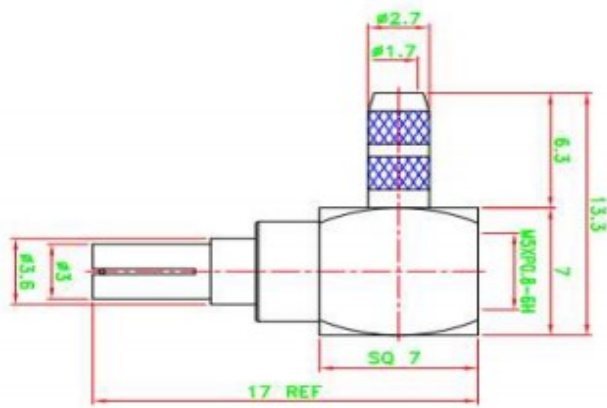

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Characteristics Impedance	50 ohm	
Frequency Range	DC to 3 GHz	
Voltage Rating	500 Volts Peak	
Dielectric Withstanding Voltage	1000 Vrms	
Insertion loss	-20 dB Max.	
Cable Attachment	Hex Braid Crimp (.128" – 3.25 mm)	
Center Conductor Attachment	Solder	
Durability	Mating cycles \geq 500	
MATERIAL&PLATING		
	Material	Plating
Connector	Brass	Au
Contact	Brass	Au
Insulator	PTFE	-
Ferrule	Copper	Au
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 55°C ~ +85 °C	
RoHS Compliant	Yes	

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in