


SRFS TELEINFRA



High Performance Test Cable Assemblies SRFS 110 , DC~110GHz

Features:

- * Low Insertion Loss
- * High Phase Stability
- * High Power
- * High Durability

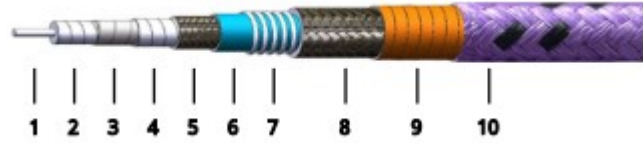

Electrical Specifications	
Frequency:	DC~110GHz
Impedance:	50Ω
Velocity of Propagation:	80%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	400V DC
Unarmored Bend Radius (installation/repeated):	10mm/20mm min
Armored Bend Radius (installation/repeated):	30mm/50mm min.
Bending Life Cycle:	50,000
Inner Conductor	Silver-plated copper
Dielectric	Low density PTFE
Inner Shield	Silver-plated copper tape
Outer Shield	Silver-plated copper braid
Jacket	FEP
Environmental Specifications	
Operating Temperature	-55° to + 125°



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in ,info@srfsteleinfra.com

 www.srfsteleinfra.in