


# SRFS TELEINFRA

SMA/Male 50 Ohm to BNC/Female 75 Ohm Impedance  
Matching Pad 2 GHZ



TECHNICAL & MECHANICAL SPECIFICATIONS	
Frequency Range	0-2 GHz
VSWR	1.30 Max
Insertion Loss	6dB
BNC&SMA Interface per	MIL-STD-348B
MATERIALS	
Body	Nickel Plated Brass
Contacts	Brass(Male) , BeCu(Female)
Contact Plating	SucoPRO
Dielectric	PTFE
ROHS Compliant	Yes

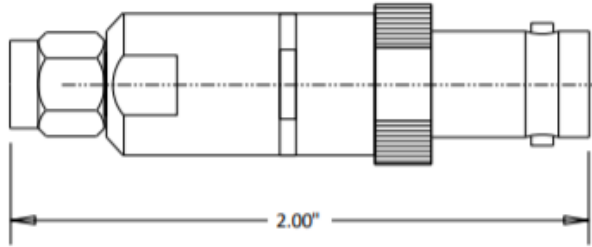

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)