


# SRFS TELEINFRA

## 4 IN 1 OUT Hybrid Combiner

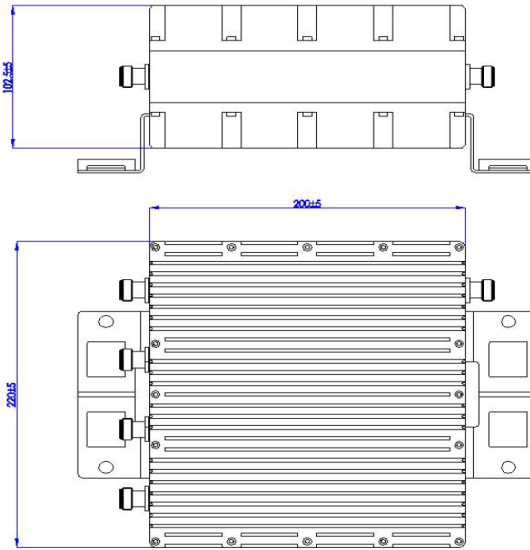

Electrical Specifications	
Frequency Range	698-4000 MHz
Power handling	300W
Insertion Loss	≤7.5dB
Isolation between Bands	≥ 20 dB
VSWR	≤1.3
PIM3	≤ -150dBc @2x43dBm
Impedance	50Ω
Frequency Range	698-3800 MHz
Power handling	300W
Mechanical Specifications	
Interface	N female
Weight (Expected)	5~6kg
Material	Aluminum
IN Port	4 Nos.
OUT Port	1 Nos.
Color	Black
Environmental Specifications	
Operational Temperature	-25°C to +65°C
Relative Humidity	≤ 95%
Applications	Indoor
Waterproof Grade	IP55