

# SRFS TELEINFRA


Get connected with us:



## 4 IN 1 OUT Hybrid Combiner -165dBc (Model No. SRFS-LPHC-41-5G)



| Electrical Specifications    |                    |
|------------------------------|--------------------|
| Frequency Range              | 698-4000 MHz       |
| Power handling               | 500W               |
| Insertion Loss               | ≤7.5dB             |
| Isolation between Bands      | ≥ 20 dB            |
| VSWR                         | ≤1.3               |
| PIM3                         | ≤ -165dBc @2x43dBm |
| Impedance                    | 50Ω                |
| Mechanical Specifications    |                    |
| Interface                    | N female           |
| Weight (Expected)            | 5~6kg              |
| Material                     | Aluminum           |
| IN Port                      | 4 Nos.             |
| OUT Port                     | 1 Nos.             |
| Color                        | Black              |
| Environmental Specifications |                    |
| Operational Temperature      | -25°C to +65°C     |
| Relative Humidity            | ≤ 95%              |
| Applications                 | Indoor             |
| Waterproof Grade             | IP55               |

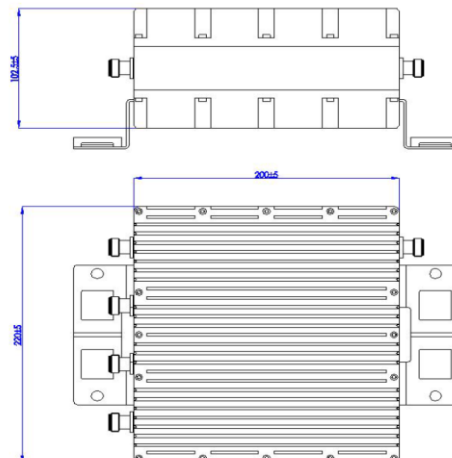

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

