

SRFS TELEINFRA


Get connected with us:



4 IN 2 OUT Hybrid Combiner -165 dBc (Model No. SRFS-LPHC-42-5G)



Electrical Specifications	
Frequency Range	698-4000 MHz
Power handling	500W
Insertion Loss	≤7.5dB
Isolation between Bands	≥ 20 dB
VSWR	≤1.3
PIM3	≤ -165dBc @2x43dBm
Impedance	50Ω
Mechanical Specifications	
Interface	N female
Weight (Expected)	5~6kg
Material	Aluminum
IN Port	4 Nos.
OUT Port	2 Nos.
Color	Black
Environmental Specifications	
Operational Temperature	-25°C to +65°C
Relative Humidity	≤ 95%
Applications	Indoor
Waterproof Grade	IP55

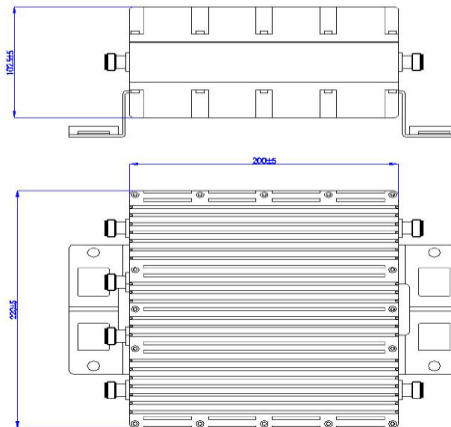

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

