

# SRFS TELEINFRA






## 4T4R LOW PIM INDOOR PANEL ANTENNA 698-4000 MHz

Electrical Specifications			
Frequency range (MHz)	698 ~960	1710~2700	3300~4000
Polarization	±45°		
Gain (dBi)	6±1	8±1	8±1
Horizontal beamwidth (°)	80±15	60±15	65±15
Vertical beamwidth (°)	75	55	40
Front-to-back ratio (dB)	≥20	≥25	≥20
Isolation (dB)	≥18	≥20	≥25
Temperature range	-45°C to+85°C		
Impedance (Ω)	50		
VSWR	≤1.8		
Intermodulation	IM3 (2×43dBm carrier) ≤-150dBc		
Maximum power (W)	100W		
Lighting protection	DC Ground		
Mechanical Specifications			
Connector	4*4.3-10 Female or 4* N-Female		
Connector position	Bottom		
Exposed cable size (cm)	30(or customer requirement)		
Height/width/depth (mm)	410*305*84		
Packing size (mm)	480*370*180		
Weight (kg)	2		
Radome material	ABS		
Radome color	White (RAL9003)		
Operating temperature (°C)	-40~60		
Application	Indoor		
Mounting	Wall Mounting		

698~960MHz: ±45° Pol.

1710~2700MHz: ±45° Pol.

3300~3800MHz: ±45° Pol.



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

# SRFS TELEINFRA




## 4T4R LOW PIM INDOOR PANEL ANTENNA 698-4000 MHz


Product pictures



Product size

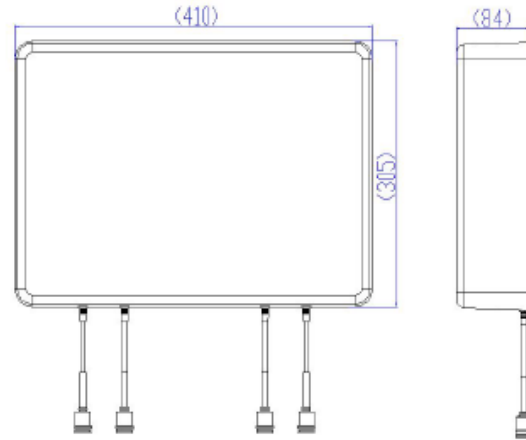

### Installation Sketch

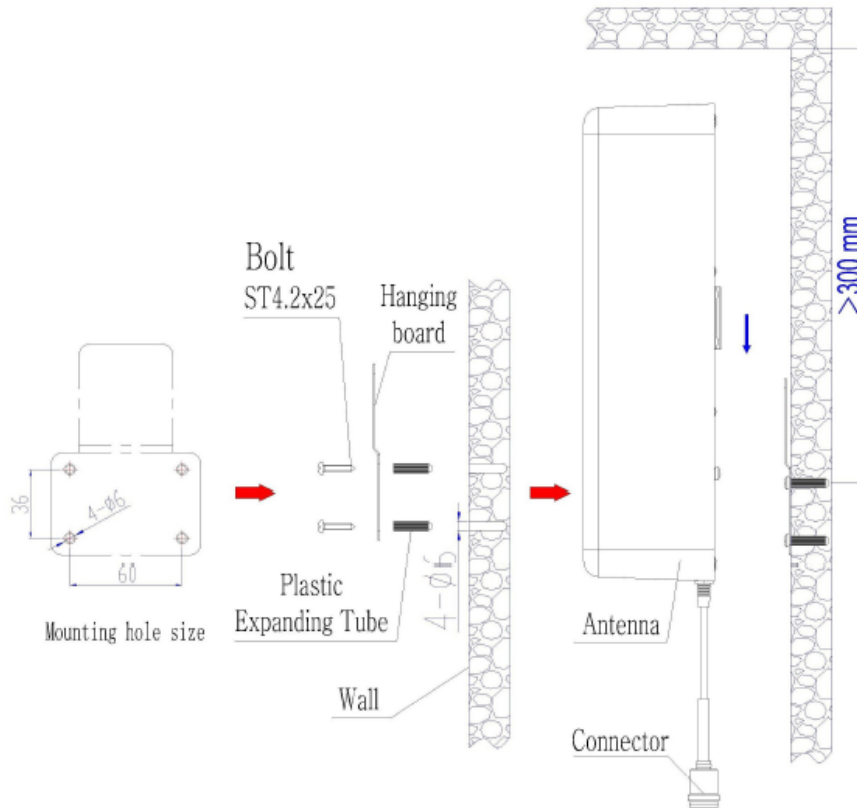

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)