

SRFS TELEINFRA



4T4R LOW PIM OMNI ANTENNA 600-4000 MHz

Model: SRFS-600-4000HH-3A-LP



Electrical and Mechanical Specifications

Frequency Range, MHz	600-698	698-960	1710-2700	3300-4000
Gain, dBi	2.5	3.5	4.0	4.5
VSWR	≤2.5	≤2.0	≤2.0	≤2.0
Isolation	>12 dB	>15 dB	>20 dB	>22 dB
Vertical Beamwidth	110°	90°	46°	38°
Polarization	Linear H/V for each Radiator			
Connector	4 x N Female or 4 x 4.3-10 Female			
PIM, 3rd Order, 2x20W	≤-150 dBc			
Input Impedance	50 Ω			
Max.Power	50 W			
Lightning Protection	DC Ground			
Dimensions	Ø320x50mm			
Weight	1.0 kg			
Radome Material	ABS (UV Stabilized)			
Operating Temperature	-40°C to +65			
Mounting	Ceiling Mount			
Dimensions	Ø320x50mm			



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in


SRFS TELEINFRA




4T4R LOW PIM OMNI ANTENNA 600-4000 MHz

Model: SRFS-600-4000HH-3A-LP


Horizontal

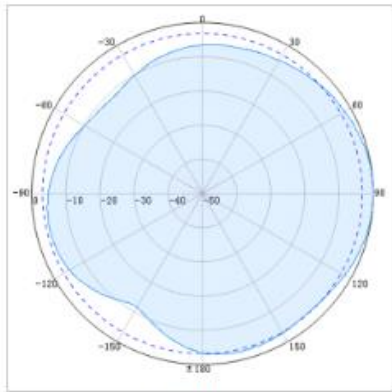

600MHz

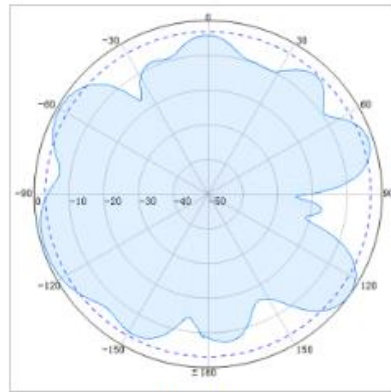


2170MHz

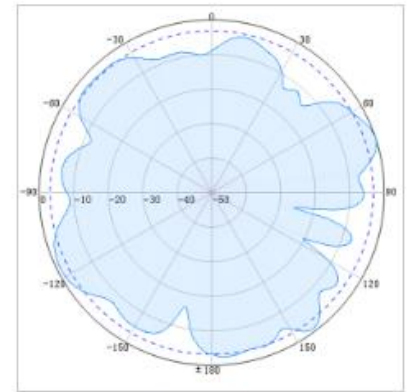


3800MHz


Vertical

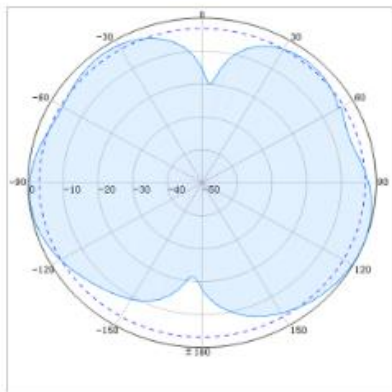

600MHz

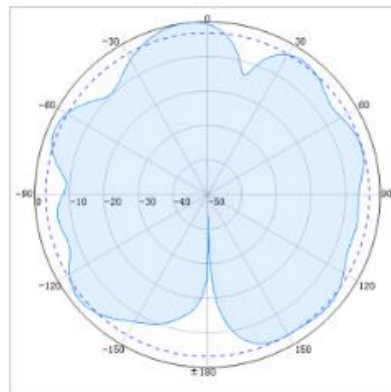

2170MHz

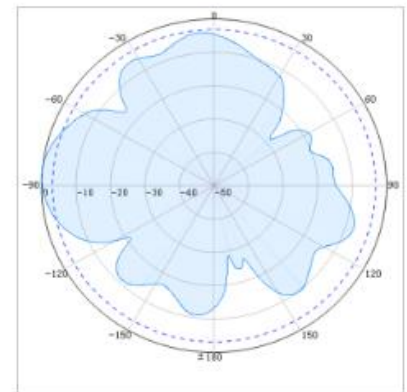

3800MHz



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-7838349349 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in