

SRFS TELEINFRA


Get connected with us:



2.4mm Female to 2.4mm Female Adapter

P/N: SRFSA5001B

Drawing(mm)

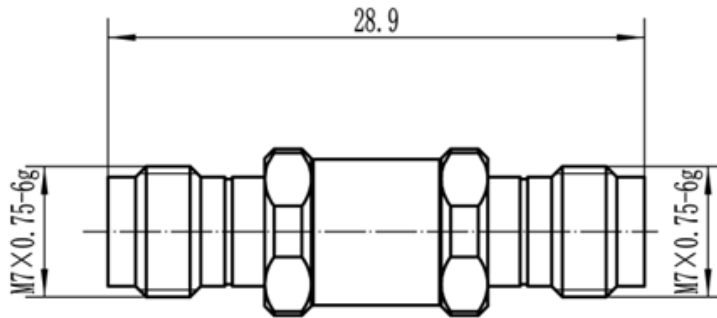

Electrical & Mechanical Specification	
Impedance	50 ohm
Frequency Range	50 GHz
VSWR	1.2 max
Operating Temp	-55°C to +165°C
Interface	2.4mm per IEC 61169
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

Typical Test Data



Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

