


## 4-Way Power Splitter (698-4000MHz)

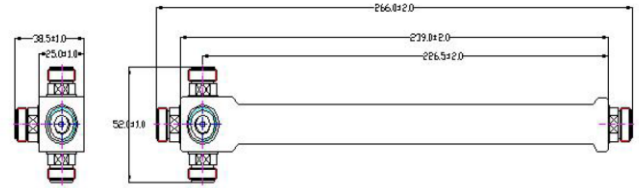

### Product Description

- Wide Frequency Band 698-4000MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65
- Widely used for In-building Solutions

### Electrical & Mechanical Specifications

Frequency (MHz)	698-4000
Input Port Number	1
Output Port Number	4
Split Loss(dB)	6.0
IL (dB)	≤0.6
VSWR	≤1.3
3rd PIM (dBc)	≤-150dBc@2*43dBm
Average Power(W)	300
Impedance	50 ohm
Connector	N-Female
Color	Weight Black
Temp(deg)	-35~+65
Application	Indoor & Outdoor IP65
Relative Humidity	5%-95%
Dimensions(mm)	268.6*60.4*42.7 (Connectors Included)