
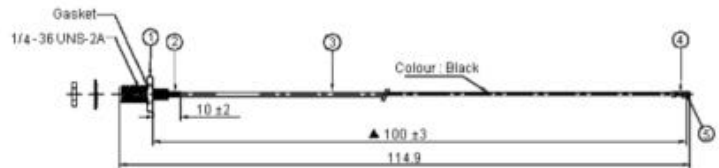


SMA Female Straight Bulkhead 1.13mm cable (10 cm) UFL

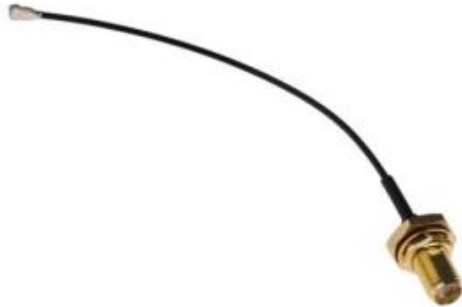

Electrical Specifications

Impedance:	50Ω
Capacitance (nominal):	3.43dB/m (at 3GHz); 5.13dB/m (at 6GHz)
Insulation resistance:	500MΩ (Min.)
Dielectric Withstanding Voltage:	60V AC (rms)

Mechanical Specifications

Cable diameter (Max.):	1.37mm (options of 1.32mm double screened cable)
Cable bend radius (Min.):	16mm (for 1.37mm)
Temperature range:	-40°C to +90°C
Mating torque (Max.):	0.245 N-m
Cable lengths (standard):	100mm