


## 2 Way DIN-F 698-4000 MHz Power Splitter

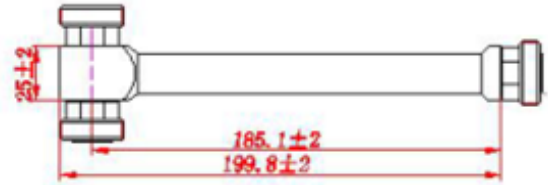

### Product Description

- Wide Frequency Band 698-4000 MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65
- Widely used for In-building Solutions.

Electrical & Mechanical Specifications	
Frequency	698-4000 MHz
Impedance	50Ω
Type	2 Way
Split loss	≤3.3 dB
VSWR	≤1.2
Insertion Loss	≤0.3dB
PIM3	≤-160 dBc @ 43dBm*2
Power	500W
Application	Indoor & Outdoor
Operating temperature	-30~+85°C
Connector	DIN-F
Degree of protection	IP 65
Relative Humidity	Up to 95 %
Dimensions	200*185*25 mm
Appearance	Black