


# SRFS TELEINFRA

Get connected with us:



## 2-Way Power Splitter (698-4000MHz)

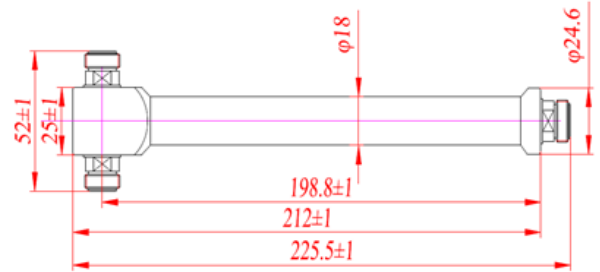

### Prod

- Wide Frequency Band 698-4000MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65  
Widely used for In-building Solutions.

Electrical & Mechanical Specifications	
Freq (MHz)	698-4000
Input Port Number	1
Output Port Number	2
Split Loss(dB)	3.5± 0.3
IL (dB)	≤0.4
VSWR	≤1.25
3rd PIM (dBc)	≤-150dBc@2*43dBm
Average Power(W)	300
Impedance	50 ohm
Connector	N-Female
Color	Weight Black or Customized
Temp(deg)	-35~+65
Application	Indoor & Outdoor IP65
Relative Humidity	Up to 95%
Dimensions(mm)	222.5*52*25 (Connectors Included)

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

