


3-Way Power Splitter (698-4000MHz)



Product Description

- Wide Frequency Band 698-4000MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65
- Widely used for In-building Solutions

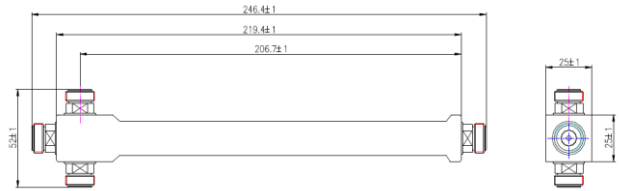

Electrical & Mechanical Specifications	
Freq (MHz)	698-4000
Input Port Number	1
Output Port Number	3
Split Loss(dB)	5.2 ±0.3dB
IL (dB)	≤0.5
VSWR	≤1.25
3rd PIM (dBc)	≤-150dBc@2*43dBm
Average Power(W)	300
Impedance	50 Ohm
Connector	N-Female
Color	Weight Black
Temp(deg)	-35~+65
Application	Indoor & Outdoor IP65
Relative Humidity	Up to 95%
Dimension(mm)	246.4*52*25(Connectors Included)