


4 Way DIN-F 698-4000 MHz Power Splitter

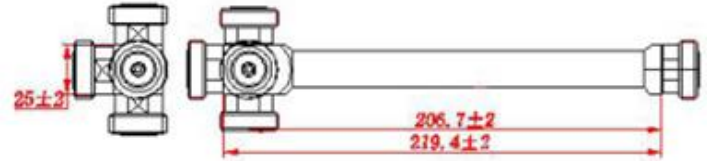

Product Description

- Wide Frequency Band 698-4000 MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- Indoor & Outdoor Application IP65
- Widely used for In-building Solutions.

Electrical & Mechanical Specifications	
Frequency:	698-4000 MHz
Impedance:	50Ω
Type	4 way
Split loss	≤6.1 dB
VSWR	≤1.3
Insertion Loss	≤0.55dB
PIM3	≤-160dBc@43dBm*2
Power	500W
Application	Indoor & Outdoor
Operating temperature	-30~+85°C
Connector	DIN-F
Degree of protection	IP65
Relative Humidity	Up to 95 %
Dimensions	219.4*207*25 mm
Appearance	Black paint