


Tri-Band Combiner (1710-1880,1920-2690,3300-4000 MHz)

Features:

1. Frequency covers 1710-1880,1920-2690,3300-4000 MHz
2. Low PIM
3. Pole or wall mounting
4. Suitable for indoor and outdoor application

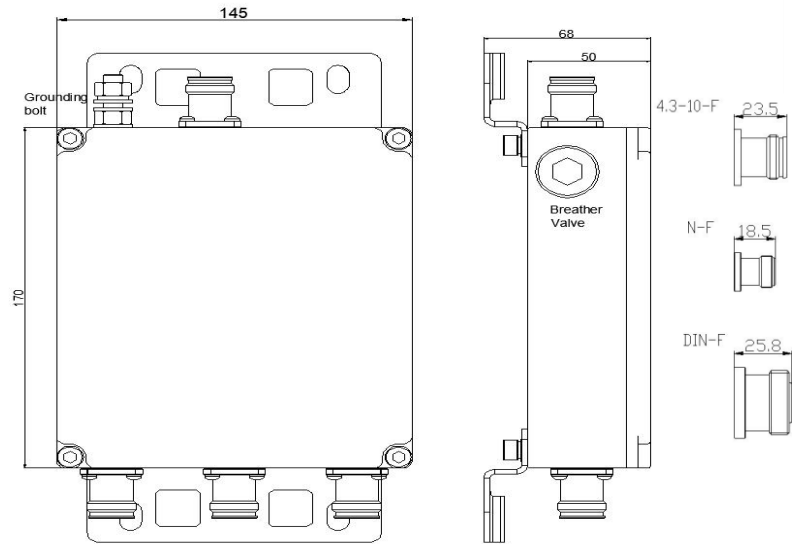

Electrical & Mechanical Specifications			
Freq (MHz)	1710-1880	1920-2690	3300-4000
Insertion Loss(dB)	0.5 ± 0.1		
Isolation(dB)	≥50		
Return Loss(dB)	≥19		
VSWR (dB)	≤ 1.25		
PIM (dBm)	≤ -153dBc@ 2 x 43dBm		
Maximum Input (W)	500W		
Operating temperature (°C)	-40°C ~ +80°C		
Relative humidity	Up to 95 %		
Impedance	50 Ω		
Lightning Protection	DC Ground		
Connector Type	N Female/4.3-10 Female/DIN Female		
Ingress protection	Indoor/outdoor		
Color	Grey (M L440c)		
ROHS Compliance	Yes		
Mounting	Wall Mount or Pole Mount		