


SRFS TELEINFRA

Get connected with us:



3-Way Power Splitter 698-4000MHz (4.3-10 Female, $\leq -155\text{dBc}$, 300W)

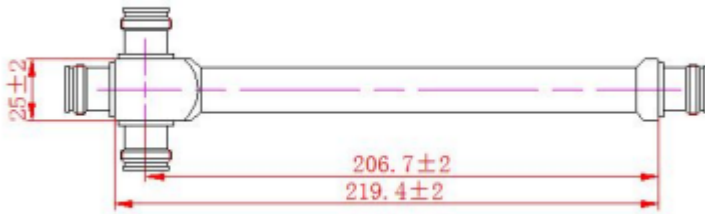

Electrical & Mechanical Specifications	
Item Name	3 Way
Freq (MHz)	698-4000
Insertion Loss	$\leq 5.2\text{dB}$
VSWR	≤ 1.2
In-band Ripple	$\leq 0.43\text{dB}$
Input Port Number	1
Output Port Number	2
3rd PIM (dBc)	$\leq -155\text{dBc}@2 \times 43\text{dBm}$
Average Power(W)	300W
Impedance	50 ohm
Connector Type	4.3-10-Female
Size	219*25mm
Color	Weight Black
Temp(deg)	$-45 \sim +85^\circ\text{C}$
Weight	0.22kg
Degree of protection	IP65
Finish	Black Paint

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023



