


SRFS TELEINFRA

350-4200 MHz 2 Way Power Splitter

Get connected with us:

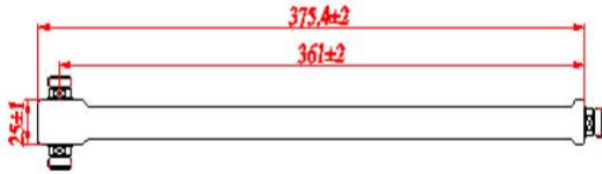

ELECTRICAL & MECHANICAL SPECIFICATIONS	
Items	2 way
Frequency Range	350-4200 MHz
Insertion Loss	≤3.4dB
VSWR	≤1.2
PIM3	≤-150dBc@2×43dBm
Power	300W(Average)
Impedance	50Ω
Connector	N-F
Size(mm)	375*25
Material	Brass connector/Aluminum cavity
Conductor	Silver plated
Operating Temperature	-20~+55°C
Appearance	Black Paint

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

