

SRFS TELEINFRA

Get connected with us:



Power Splitter (Cavity Model, 300-4000 MHz, 200W, N-F, IP65)


Description:

- ◆ Wide Frequency Band 300-4000MHz
- ◆ Low VSWR & Insertion Loss
- ◆ Indoor & Outdoor Application IP65
- ◆ Widely used for In-building Solutions



ELECTRICAL & MECHANICAL SPECIFICATIONS	
Freq (MHz)	300-4000MHz
Input Port Number	1
Output Port Number	2
Split Loss(dB)	3.0
IL (dB)	≤0.3
VSWR	≤1.35@300-380MHz ≤1.30@380-4000MHz
Total Input Power(W)	200
Impedance	50 ohm
Connector	N-female Color Black-plated
Temp(deg)	-30~+70
Material	Application Indoor or Outdoor, IP65

INNOVATIONS IN TELECOM WORLD

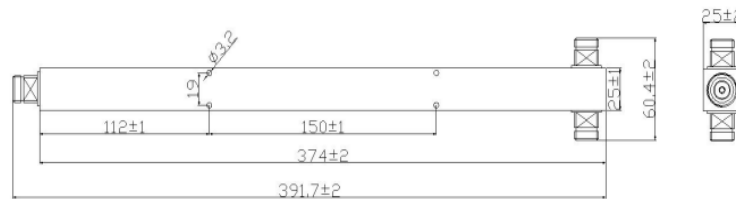

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

