


## Low PIM 4.3-10 Female to Nex10 Female Adapter

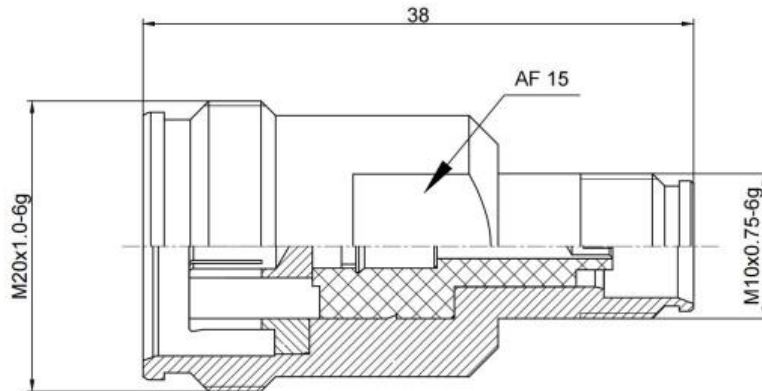

| ELECTRICAL SPECIFICATIONS |                                |
|---------------------------|--------------------------------|
| Impedance                 | 50 ohm                         |
| Frequency Range           | DC-6 GHz                       |
| VSWR                      | 1.25 max                       |
| PIM (Intermod)            | -160dBc min with 2x20W tones   |
| Operating Temp            | -40°C ~ +125°C                 |
| RoHS                      | Compliant                      |
| MATERIAL & PLATING        |                                |
| Connector Body            | Ternary alloy plated brass     |
| Center Contact            | Silver plated beryllium copper |
| Insulator                 | PTFE                           |