



9 dBi RFID Rubber-Duck Antenna with SMA Male Movable Model No – SRFS-2400/2500-SMAM-9RFIDDA



Electrical and Mechanical Specifications	
Frequency Range	2400 ~ 2500 MHz
Gain	9dBi
VSWR	<1.5
Polarization	Vertical
Front to Back Ratio	≥ 15 dB
Impedance	50 Ohm
Lightning Protection	INNOVATIONDC GroundOM WORLD
Maximum Input Power	50 W
Directional	Omni
Radom Material	ABS/PP
Connector	SMA M (Movable) or Customized
Antenna Length	290 mm
Color	Black
Humidity	5~95%
ROHS Compliant	Yes
Operating Temperature (°C)	-40°C ~ 85°C

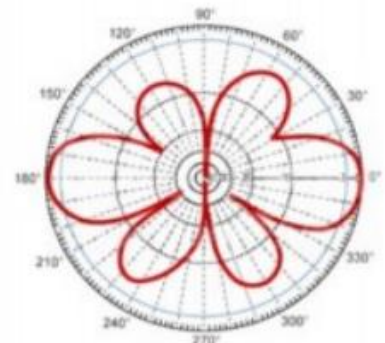

Vertical

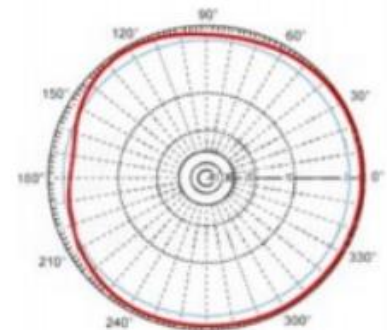

Horizontal