


N Female 4 Hole for RG 316 / RG 174/ LMR 100 Crimp Connector

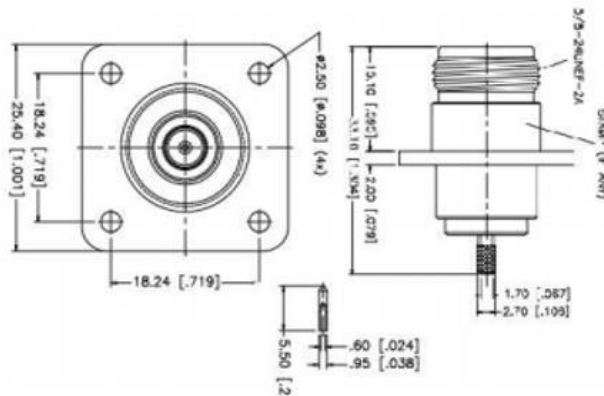

Electrical & Mechanical Specifications		
Frequency Range	DC-4 GHz	
Characteristic Impedance	50 Ω	
VSWR	≤1.15@DC-3GHz	
Dielectric Withstanding Voltage	1000Vrms, 50 Hz at sea level	
Test Voltage DC	2000 V	
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ	
Dielectric Resistance	≥5000MΩ	
Average Power	0.6 KW @ 900 MHz	
Peak Power	10.00 KW	
Durability	Mating cycles ≥500	
Material & Plating		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor Copper	Au
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	