


SRFS TELEINFRA

Get connected with us:



N Female for 1/4" LDF Connector

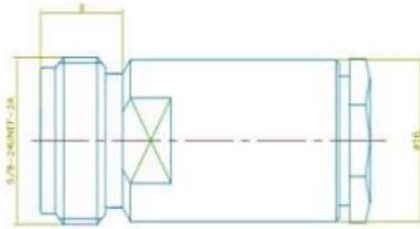

Electrical & Mechanical Specifications		
Frequency Range	DC-7.5 GHz	
Characteristic Impedance	50 Ω	
VSWR	≤ 1.15 @DC-4 GHz,	
Dielectric Withstanding Voltage	2500Vrms,50Hz, at sea level	
Working Voltage	1000Vrms,50 Hz at sea level	
Contact Resistance	Center Contact ≤ 1.0 m Ω Outer Contact ≤ 0.25 m Ω	
Insulation Resistance	≥ 5000 M Ω	
Durability	Mating cycles ≥ 500	
Material & Plating		
	Material	Plating
Body	Brass	CuSnZn
Insulator	PTFE	-
Gasket	Silicone Rubber	-
Center conductor	Phosphor bronze	Au
Coupling nut	Brass	Ni
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

