


SRFS TELEINFRA

Get connected with us:



N Male Connector for 7/8" Feeder Cable

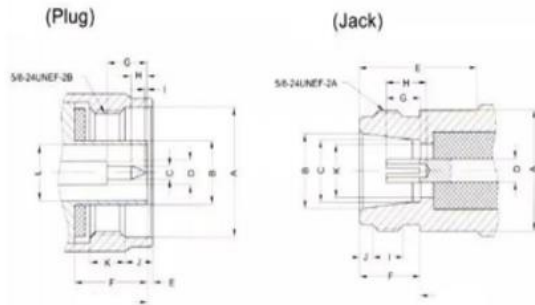

Electrical & Mechanical Specifications		
Frequency Range	DC-11GHz	
Characteristic Impedance	50 Ω	
VSWR	≤ 1.20 @DC-3000MHz,	
Dielectric Withstanding Voltage	2500Vrms, 50 Hz at sea level	
Working Voltage	1000Vrms, 50 Hz at sea level	
Contact Resistance	Center Contact ≤ 1.0 m Ω Outer Contact ≤ 0.25 m Ω	
Dielectric Resistance	≥ 5000 M Ω	
Durability	Mating cycles ≥ 500	
Material & Plating		
	Material	Plating
Body	Brass	Ni
Inner Pin	Brass	Gold Plated
Contact Resistance	Beryllium Copper	Gold Plated
Insulator	PTFE	-
Crimp Ferrule	Copper Alloy	Nickel Gold Plated
O-ring sealing	Silicone Rubber	Ni
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	
Waterproof Rate	IP67	

Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

