


SRFS TELEINFRA

Get connected with us:



N Male Crimp Connector for LMR 200 Cable

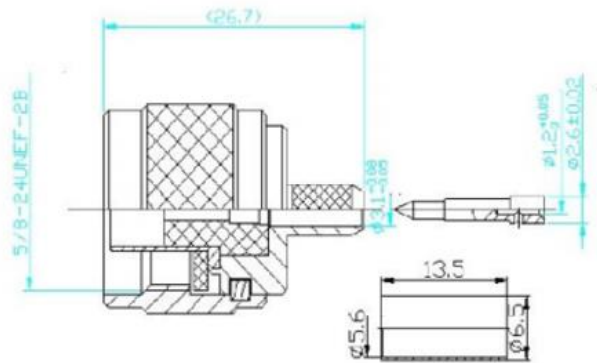

Electrical & Mechanical Specifications		
Frequency Range	DC-11GHz	
Characteristic Impedance	50 Ω	
VSWR	≤1.20@DC-3000MHz,	
Dielectric Withstanding Voltage	2500Vrms, 50 Hz at sea level	
Working Voltage	1000Vrms,50 Hz at sea level	
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	Material	Plating
Body	Brass	Nickel Plated / Alloy Plated
Gasket	Silicone Rubber	-
Ferrule	Annealed copper	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Coupling nut	Brass	Ni
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	
Water Proof Rate	IP67	

Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

