


SRFS TELEINFRA

RG-141 SUCO FORM CABLE

Get connected with us:

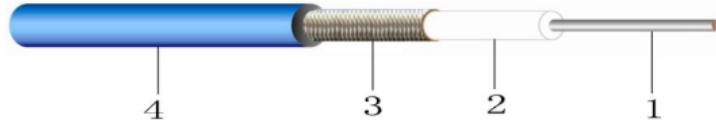

ELECTRICAL & MECHANIC		
Suitable Frequency	Up to 18 GHz	
Impedance	50 Ω	
Capacitance	95 \pm 5 pF/m	
Velocity of signal propagation	70 %	
Maximum Voltage	2000 VMS	
Temperature Rating	-40 ~ 90 °C	
Bending Radius	40mm	
CONSTRUCTION		
Item	Material	Diameter
Inner Conductor	Silver Plated Copper	1/0.94mm
Insulation	Solid extruded PTFE	1.68 \pm 0.10 mm
Wire Braid	TN, SN	96*0.12mm
Jacket	FEP	4.30 \pm 0.10mm

Attenuation and Power	
Freq. (MHz)	dB/100m
500	27
1000	40
2000	58
5000	94
10000	145
15000	186

Add: plot no 10 shiv Vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam Nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

