


# SRFS TELEINFRA

## VHF High Gain Yagi Antenna

Get connected with us:

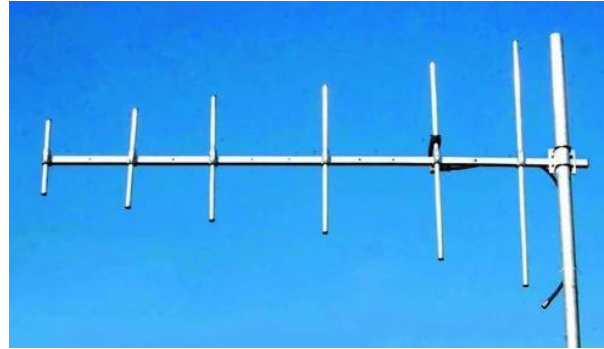

Electrical & Mechanical Specifications	
Frequency Range	136 - 174 MHz.
Gain	12 dBi.
Bandwidth	8 MHz.
Polarization	Vertical or Horizontal
Input Impedance	50 Ohms.
Horizontal Beam-width Half Power Points.	65 Degrees
Vertical Beam-width Half Power Points.	55 Degrees
Front to Back Ratio	16 dB.
VSWR – Better Than	1:1.5
RF Power Handling Capacity	500 Watts.
Input Termination	N -Female
Mounting Hardware -Materials	Stainless Steel
Weight	5.0 Kgs.
Wind Rating	200 Km/Hr.
Overall Length	2.0 Meters.
Shipping Length	2.1 Meters.
Support Boom-Materials -Cross Section-Outer Diameter.	Aluminum-Square Tube -25.4mm
Elements-Materials-Cross Section-Outer Diameter.	Aluminum-Round Tube-19mm
Maximum Mount Pipe Diameter	52mm (2 Inches)
Environmental Specification	
Operating Temperature	(-)30 to +70 Degrees Celsius
Storage Temperature	(-)40 to +80 Degrees Celsius
Humidity	0 to 95% RH

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059  
 +91 7838349349, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.in, srfsteleinfra@gmail.com  
 www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
 SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
 It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
 See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

