


# SRFS TELEINFRA

Get connected with us:



## 20dB Fixed Attenuator Model No.- SRFS-FAT-20

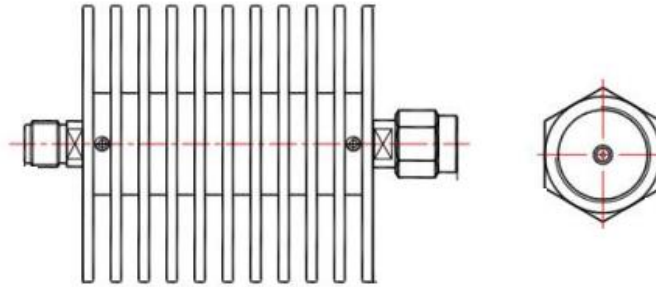

Technical & Mechanical Specifications	
Frequency	DC-18 GHz
Impedance	50 ohm
VSWR	1.35 max
Input Avg Power	25W@ 25°C
Peak Power	1kW
Voltage Withstand	Bidirectional, SMA female to SMA male
Attenuation	20 dB
Accuracy(dB)	±0.8
Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS Compliant	yes

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam nagar new delhi-110059

+91 7838349349, +91 8076749052 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

