


SRFS TELEINFRA

Get connected with us:



7/16 DIN Male Crimp Connector for LMR 240

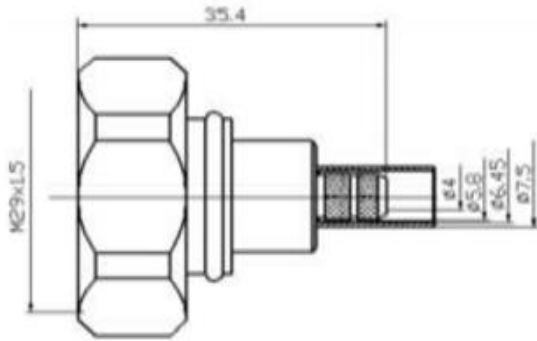

Electrical & Mechanical Specifications		
Frequency Range	DC 7.5 GHz	
Characteristic Impedance	50 Ω	
VSWR	≤1.10@DC-3000MHz	
Insertion Loss	≤0.10dB@2200MHz	
Intermodulation 3rd	≤ -157dBc@2×20W	
Dielectric Withstanding Voltage	4000V rms,50Hz,at sea level	
Working Voltage	2700V RMS,50Hz,at sea level	
Dielectric Resistance	≥10000MΩ	
Contact Resistance	Center Contact ≤0.4mΩ Outer Contact ≤1.0mΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	Material	Plating
Body	Brass	Tri-alloy
Insulator	PTFE	-
Center Conductor	Phosphor bronze	Ag
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteinfra.in, aayush@srfsteinfra.in, srfsteinfra@gmail.com

www.srfsteinfra.in, www.srfsteinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteinfra.in for the most current information. Revised: 19 Jan 2023

