SRFS TELEINFRA

Get connected with us:

MMCX Male Crimp Connector For RG316 RG174/RG188/LMR100 Cable

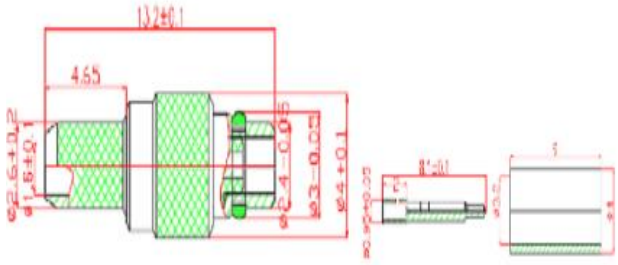

Electrical & Mechanical Specifications		
Frequency Range	DC-6GHz	
Characteristic Impedance	50 Ω	
VSWR	≤1.25@DC-3000MHz	
Dielectric Withstanding Voltage	500V RMS,50Hz, at sea level	
Working Voltage	170Vrms,50 Hz at sea level	
Dielectric Resistance	≥1000MΩ	
Contact Resistance	Center Contact ≤ 5.0 mΩ Outer Contact ≤ 2.5 mΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	Material	**Plating**
Body	Brass	Au
Insulator	PTFE	-
Center Conductor	Beryllium bronze	Au
Resistant Contact	Phosphor bronze	Au
Ferrule	Annealed copper	Ni
Environmental		
Temperature Range	-40°C~+85°C	
RoHS	Compliant Yes	
Waterproof Rate	IP 68	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023