


## MMCX Male Right Angle RG178

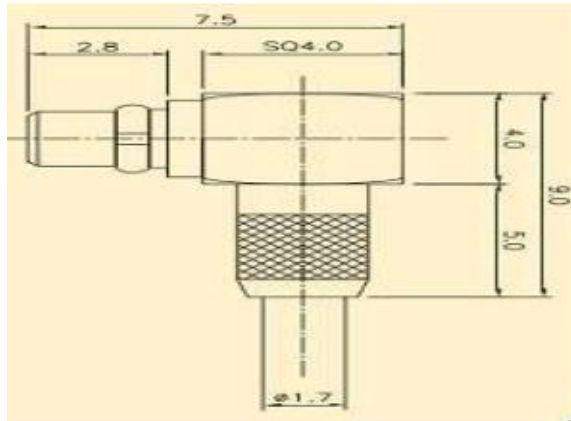

Electrical & Mechanical Specifications		
Frequency Range	DC-6GHz	
Characteristic Impedance	50 $\Omega$	
VSWR	1.30:1	
Insulation Resistance	1000 M $\Omega$ Min	
Voltage Rating	170 Vrms	
Connector Retention	500 Cycles Min	
Contact Resistance	Center Contact $\leq$ 5.0 m $\Omega$ Outer Contact $\leq$ 2.5m $\Omega$	
Cable Type	RG 178 RA	
Material & Plating		
	Material	Plating
Body	Brass	Au
Center Contact	Brass	Au
Insulator	PTFE	-
Ferrule	Brass	Ni
Environmental		
Temperature Range	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C	
RoHS	Compliant Yes	
Waterproof Rate	IP 67	