


SRFS TELEINFRA

Get connected with us:



NEX10 Male Straight Connector for 1/2" feeder Cable Soldering

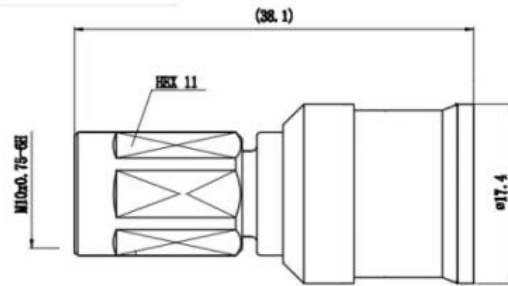

Electrical & Mechanical Specifications		
Impedance	50 Ohm	
Frequency range	DC-3.6GHz	
VSWR	≤1.18	
PIM3	≤-160dBc	
Dielectric Withstanding Voltage	≥1000V RMS,50Hz,at sea level	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
Temperature Range	-40°C ~ +85°C	
Waterproof (1m water depth, 24hours)	IP68	
RoHS	Full RoHS-Compliance	
Material & Plating		
Connector parts	Material	Plating
Body	Brass	Tri-Alloy plating
Contact PIN	Brass	Ag plating
Insulator	PTFE	Natural

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 8076749052 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

