

# SRFS TELEINFRA


Get connected with us:



## Band Pass Filter 1563.135~1864.365MHz



Electrical & Mechanical Specifications	
Frequency Range	1563.135~1864.365 MHz
Insertion Loss (Max.)	2.5dB
Return Loss (Min.)	20dB
Pass Band Ripple (Max.)	0.8dB
Attenuation (Min.)	1861.770 MHz 15dBc 1865.730 MHz
Dimensions (WxHxD)	50.0x44.8x169.0 mm
In/Out Port Connectors	SMA(F)/SMA(F)
Operating Temperature	-20°C ~ 60°C

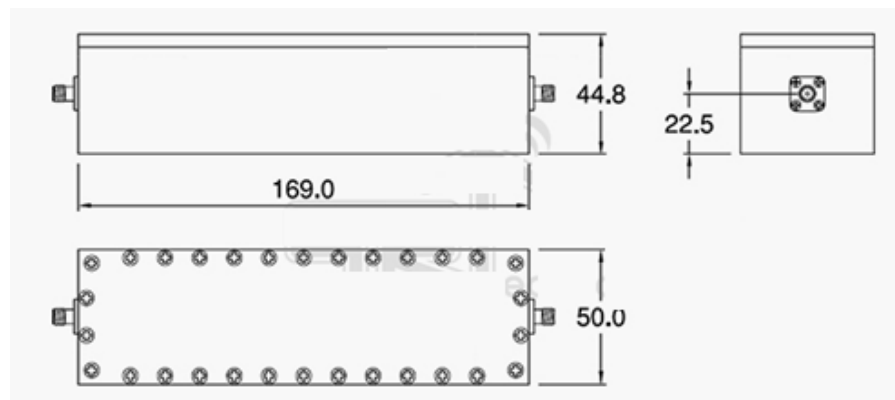

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

