

SRFS TELEINFRA


Get connected with us:



Band Pass Filter / 1931 ~ 1944 MHz



| Electrical & Mechanical Specifications | |
|--|-------------------------------------|
| Frequency Range | 1931~1944 MHz |
| Insertion Loss (Max.) | 1.0dB |
| Insertion Loss (Min.) | 18 dB |
| Pass Band Ripple (Max.) | 0.6dB |
| Isolation (Min.) | 1928.5 MHz 15dBc 1946.5 MHz 15dB |
| Dimensions (WxHxD) | 290*42*50 mm |
| In/Out Port Connectors | SMA(F)/SMF(F) |
| Operating Temperature | -20°C ~ 70°C |

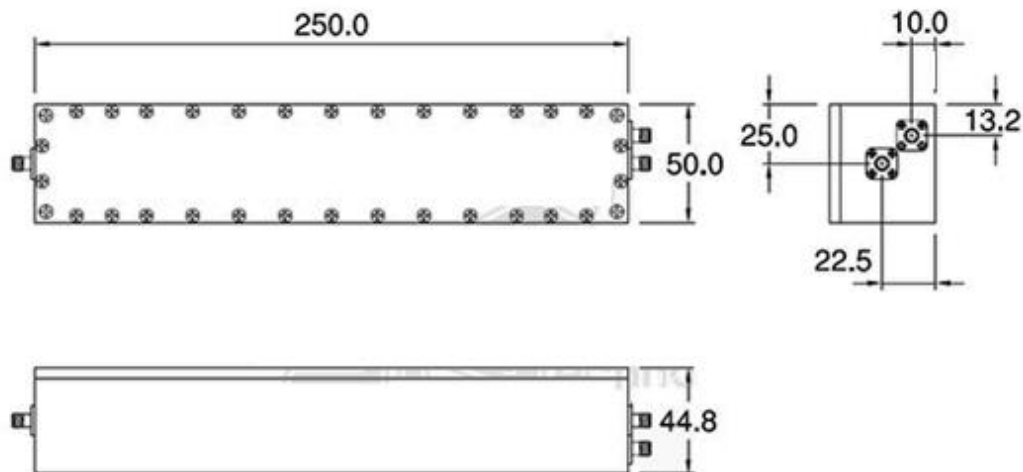

Add: plot no 10 shiv Vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam Nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

