


SRFS TELEINFRA

Get connected with us:



Band Pass Filter / 3100~3500MHz

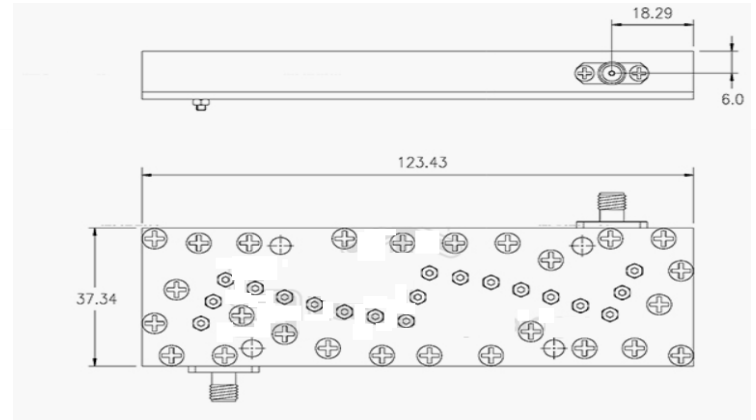

Electrical & Mechanical Specifications

Frequency Range	3.1~3.5 GHz
Impedance	50 Ω
Insertion Loss (Max.)	< 1.5dB Max
VSWR (Max.)	1.5: 1
Ripple	± 0.25 dB Max. (Per any 10MHz within Pass band)
Rejection	30 dBc @6.3~8.9GHz 35dBc @3.6GHz min. 860 dBc @2.94GHz & 3.7GHz @ 3.7~6.9GHz 80 dBc @1.5GHz

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

