


SRFS TELEINFRA


Get connected with us:



Band Pass Filter / 9245~9255MHz

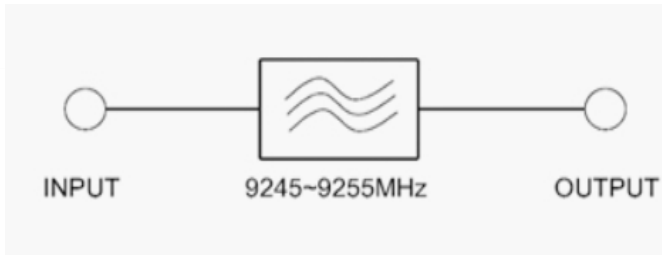

Electrical & Mechanical Specifications	
Center Frequency	9250
Bandwidth	$F_c \pm 5$ (9245~9255 MHz)
Insertion Loss in BW	2.8 max
Ripple in BW	0.6 max
Return Loss in BW	18.0 min
Attenuation	60 min. @ 9150 MHz 60 min. @ 9350 MHz
Input Power	10 max
IN/OUT Impedance	50
Operating Temperature	-30 ~ 75

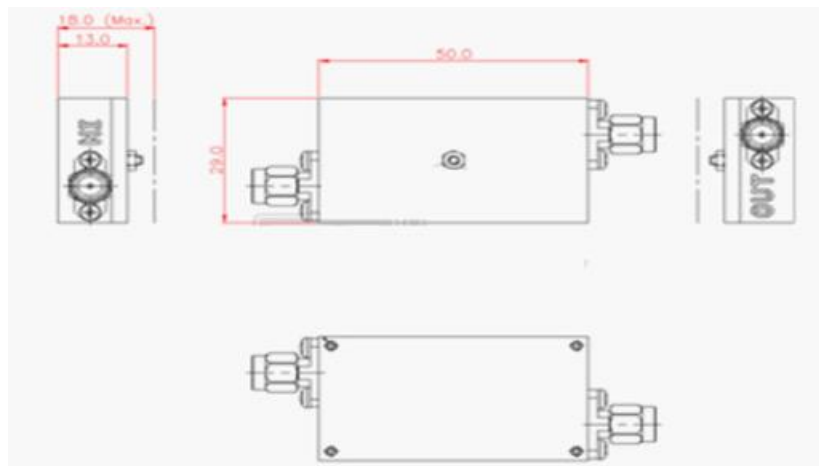

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

