


SRFS TELEINFRA

Get connected with us:



Band Pass Filter / 800~855MHz

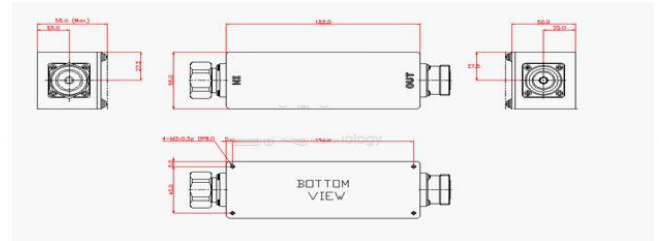

| Electrical & Mechanical Specifications | |
|--|---|
| Center Frequency | 827.5MHz |
| Frequency Range | 800~855MHz |
| Insertion Loss in BW | 1.0 max. |
| Return Loss | 18.0 min |
| Rejection | 60 min. @ 1030~3000 MHz |
| PIMD | -156 min.@2x43dBm Measured at 842MHz (800MHz and 821MHz) |
| Power handling | 100 max. |
| Impedance | 50 |
| Operation Temperature | -40 ~ +85 |
| Connector | IN: 7/16 DIN Male, OUT: 7/16 DIN Female |
| Environment Condition | IP67 |
| Finish | Black Epoxy Painting |

