


# SRFS TELEINFRA

## F Female to SMA Male Adaptor

Get connected with us:

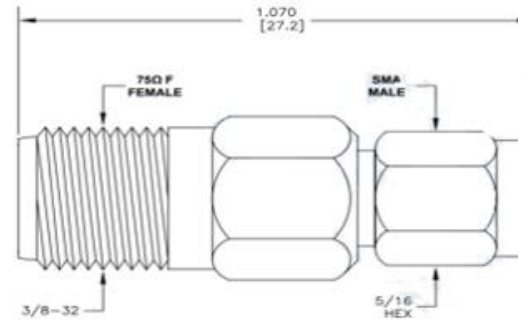

Electrical & Mechanical Specifications		
Characteristics Impedance	75 ohm	
Frequency Range	DC-3GHz	
VSWR	≤1.25 @DC-3GHz	
Dielectric Withstanding Voltage	≥2500V RMS,50Hz, at sea level	
Working Voltage	1000Vrms,50 Hz at sea level	
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	<b>Material</b>	<b>Plating</b>
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Environmental Specification		
Temperature Range	-40°C~+100°C	
Waterproof Rate	IP 68	
RoHS Compliant	Yes	

Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam Nagar new delhi-110059

+91-8435474330, +91-8800726650, +91 8076749052 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [aayush@srfsteleinfra.in](mailto:aayush@srfsteleinfra.in), [srfsteleinfra@gmail.com](mailto:srfsteleinfra@gmail.com)  
[www.srfsteleinfra.in](http://www.srfsteleinfra.in), [www.srfsteleinfra.com](http://www.srfsteleinfra.com)

