


SRFS TELEINFRA

N FEMALE TO SMA FEMALE ADAPTOR

Get connected with us:

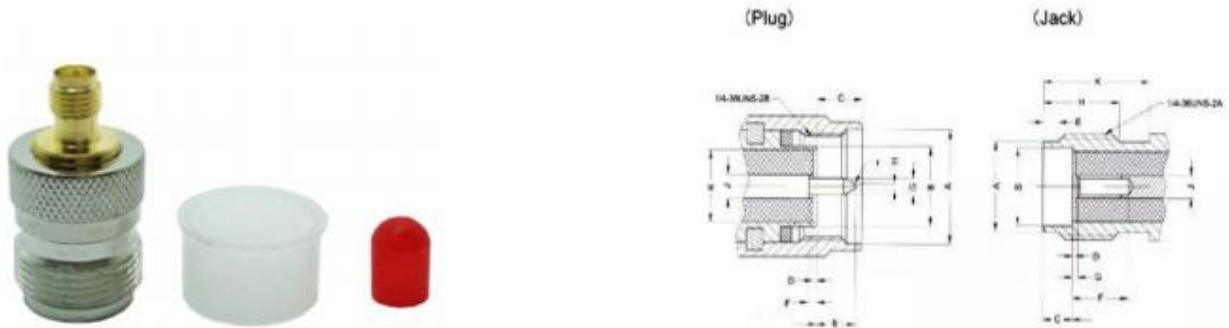

Electrical & Mechanical Specifications		
Characteristics Impedance	50 ohm	
Frequency Range	DC-12.4GHz (0 – 18 GHz)	
VSWR	Straight Soft cable $\leq 1.10+0.002f$ Semi-steel cable $\leq 1.05+0.001f$ Right angle soft cable $\leq 1.20+0.003f$ Semi-steel cable $\leq 1.10+0.001f$	
Working Voltage	335V max	
Insertion Loss	≤ 0.15 dB/6 GHz	
Withstanding Voltage	1000V RMS, 50Hz, at sea level	
Insulation Resistance	$\geq 5000M$ OHM	
Contact Resistance	Center Contact $\leq 3m\Omega$ Outer Contact $\leq 2 m\Omega$	
Dielectric Resistance	$\geq 5000M\Omega$	
Durability	Mating cycles ≥ 500	
Material & Plating		
	Material	Plating
Body	Brass	Nickel Plated/ Alloy plated
Insulator	PTFE	-
Inner Pin	Brass	Gold Plated
Socket Contact	Beryllium or tin Bronze	Gold Plated
Crimp Ferrule	Copper Alloy	Nickel / Gold Plated
Environmental Specification		
Temperature Range	$-65\sim+165^{\circ}C$ (PE Cable $-40\sim+85^{\circ}C$)	
Vibration	MTL-STD-202, Method 213	
RoHS Compliant	Yes	

Add: plot no 10 shiv Vihar a block Najafgarh Sahiba river road Vikas Nagar Uttam nagar new delhi-110059

+91-8435474330, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, aayush@srfsteleinfra.in, srfsteleinfra@gmail.com
www.srfsteleinfra.in, www.srfsteleinfra.com

