


Band Pass Filter 1863.135~1864.365MHz

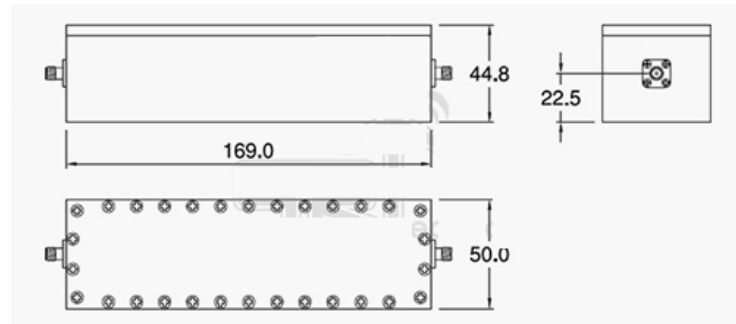

Electrical, Mechanical & Environmental Specifications	
Frequency Range	1863.135~1864.365 MHz
Insertion Loss (Max.)	2.5dB
Return Loss (Min.)	20dB
Pass Band Ripple (Max.)	0.8dB
Attenuation (Min.)	1861.770 MHz 15dBc 1865.730 MHz
Dimensions (WxHxD)	50.0×44.8×169.0 mm
In/Out Port Connectors	SMA(F)/SMA(F)
Operating Temperature	-20°C ~ 60°C