

# SRFS TELEINFRA


Get connected with us:



## Band Pass Filter 2554~2574 MHz



Electrical & Mechanical Specifications	
Frequency Range	2554~2574 MHz
Impedance	50 $\Omega$
Insertion Loss (Min.)	< 1.7dB Max
VSWR (Max.)	1.3: 1Max
Ripple	0.8dB Max
2nd Harmonics	80 dBc Min
Coupling Value	40 $\pm$ 1.5 dB
Rejection	80 dBc Min. @ 2170 MHz 15 dBc Min. @ $F_c \pm 12$ MHz

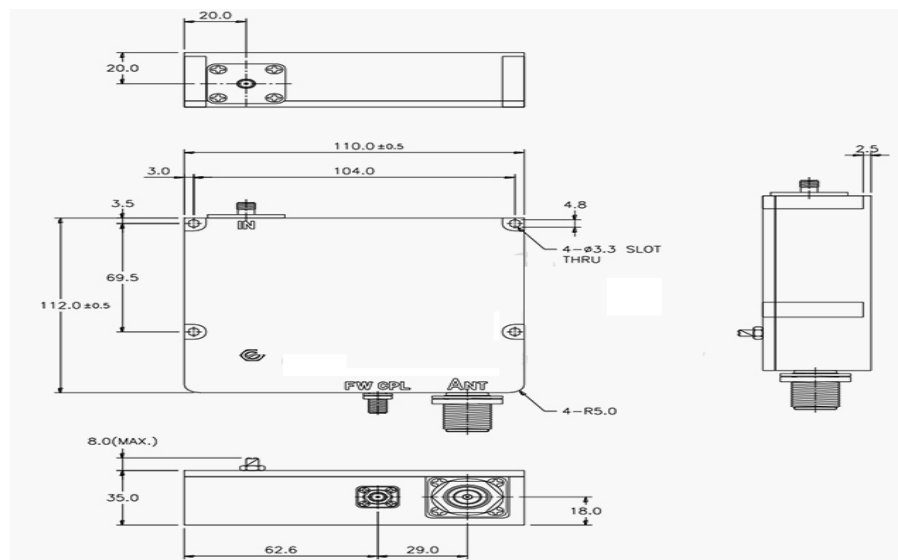

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

