

Coaxial RF Termination

SRFS-T0405S2



DC-4 GHz, SMA Male, 5 Watts

Electrical

Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.15 max
Input Avg Power	5W@ 25°C ambient, derating linearly to 0.5W at 100°C
Peak Power	500W (5 micro-sec pulse width, 0.5% duty cycle)


Mechanical

Connector Body	Passivated stainless steel
Center Contact	Gold plated brass
Heat Sink	Black anodized aluminum

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

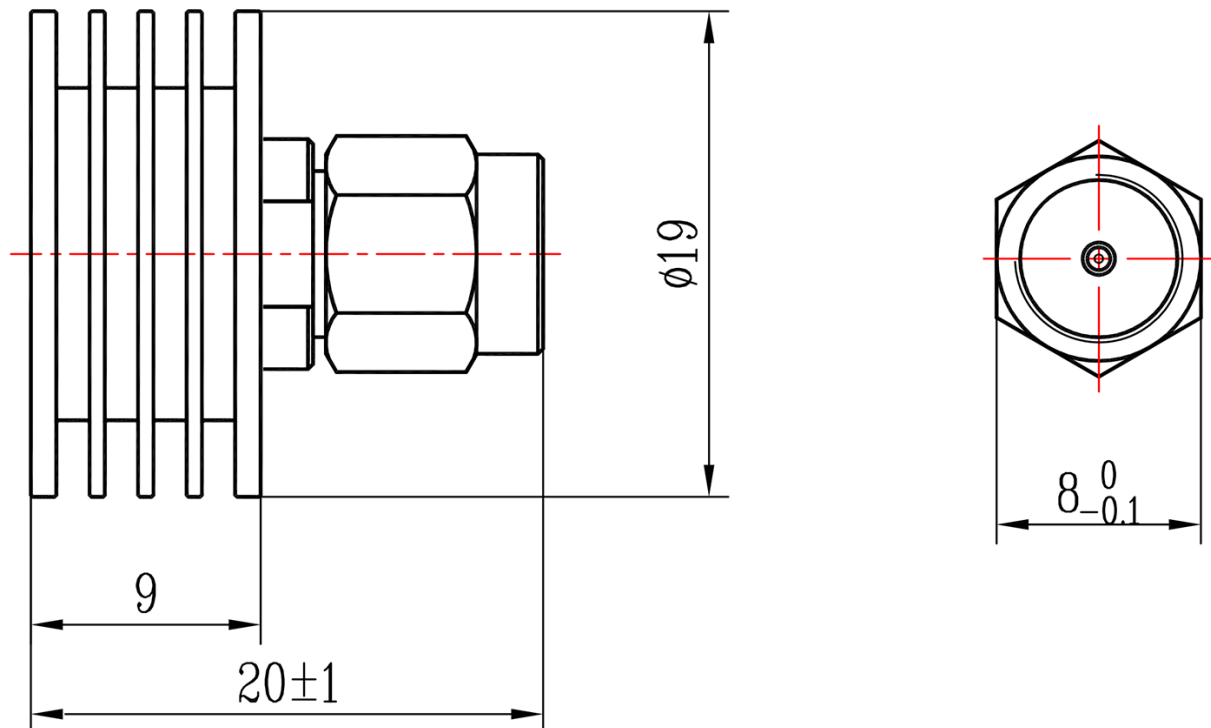

Notes

- 1.Customized outlines and optimal VSWR available.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.