


698-3800MHz 3dB Hybrid Coupler

Product Description:

698-3800MHz 3dB Hybrid Coupler

698-3800MHZ 4.3-10 Female Low PIM -160dbc 3dB Hybrid Coupler Combiner DAS

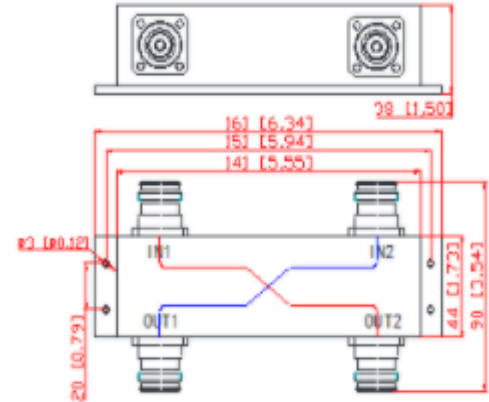

| Mechanical & Electrical Specifications | |
|--|---------------------------|
| Part Number | SRFS-HC2x2-0738-OP |
| Operating Frequency (MHz) | 698-3800 |
| Impedance (Ohm) | 50 |
| VSWR | ≤1.25 |
| Coupling (dB) | 3.0±0.9 |
| Insertion Loss (dB) | 3.7 |
| Isolation (dB) | ≥23 |
| IM3 (dBc @ 2×43dBm) | -140 / -150 / -155 / -160 |
| Application | Indoor & Outdoor |
| Degree of Protection | IP65 |
| Operating Temperature (°C) | -40 ~ + 80 |
| Interface | 4.3-10 Female |
| Handling Power (Watt, max) | 500 |
| Peak Power (Watt, max) | 1500 |
| Dimension (mm)(L×W×H, excl connector) | 141 × 44 × 38 |
| Net Weight (g) | 685 ± 20 |
| Packing Dimensions (mm,L×W×H) | 170 × 100 × 40 |
| Packing Carton Size (mm,L×W×H) | 520 × 360 × 110 |
| ROHS Compliance | Yes |

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059



+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



698-3800MHz 3dB Hybrid Coupler

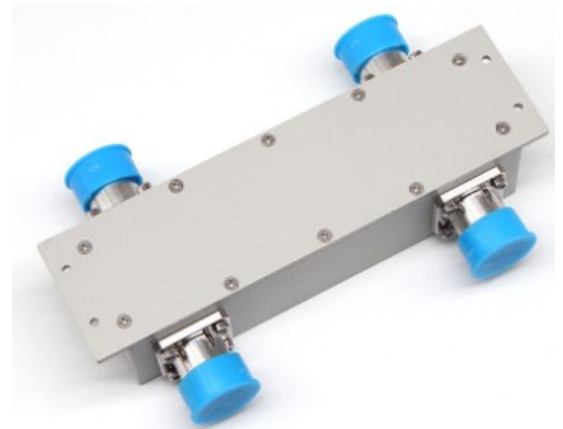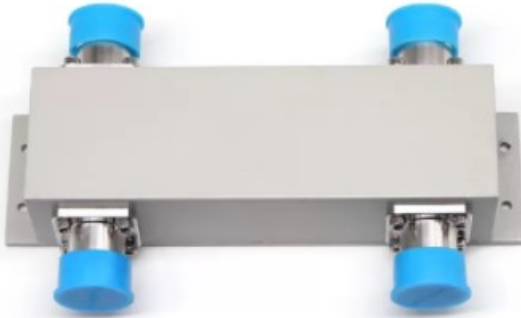

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in