


N Female -165dbc 3 Way 550 To 6000MHz Reactive Power Splitter

Product Description:

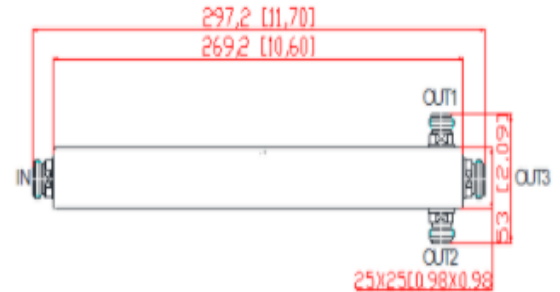

N Female -165dbc 3 Way 550 To 6000MHz Reactive Power Splitter

550-6000MHz N Female Low PIM -165dbc 3 Way Reactive Power Splitter Divider For DAS IBS

Reactive power splitters have been used to be signal divider- component for antenna distribution system (DAS) and signal cable systems for in-building /out building signal coverage because of their low loss and rugged nature., reactive splitters are quarter wave length lines matched to split signals evenly to the output paths. This characteristic allows for efficient, high power, broadband operation with minimal solder joints and better 3rd PIM.

Mechanical & Electrical Specifications	
Part Number	SRFS-PS-05560-ON3
Operating Frequency (MHz)	550-6000
Impedance (Ohm)	50
VSWR	≤1.3
Split Loss (dB)	≤5.3(smooth on test)
IM3 (dBc @ 2x43dBm)	-155/ -163
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	269.2 × 25 × 25
Net Weight (g)	450± 20
Packing Dimensions (mm,L×W×H)	320 × 80 × 60
Packing Carton Size (mm,L×W×H)	655× 410 × 140
ROHS Compliance	Yes
Color	Customized
Connector	N Female
Design	Wide Band

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



N Female -165dbc 3 Way 550 To 6000MHz Reactive Power Splitter



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in