


SRFS TELEINFRA

Get connected with us:



Band Pass Filter / 4775~5000MHz

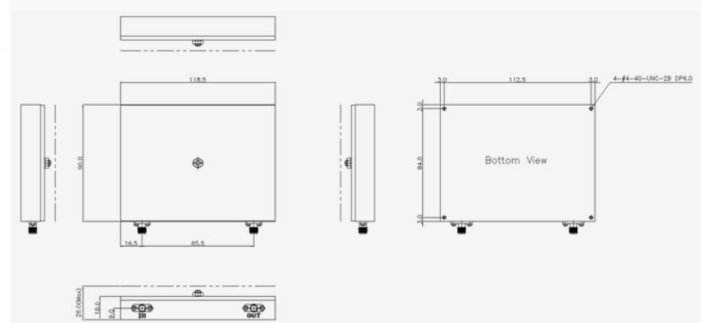

Electrical & Mechanical Specifications	
Frequency Range	4775 ~ 5000 MHz
Insertion Loss	1.0dB max
Bandwidth	225MHz min.
Return Loss	15.0 dB min.
Attenuation (Min)	90dB @4700MHz 90dB @5075MHz
Power handling	20 W (CW)
Operating Temp. Range	-20 ~ +70 °C
Dimension (WxDxH)	118.5 x 90 x 26mm
Connector	SMA TYPE Female

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 7838349349 info@srfsteleinfra.in, sales@srfsteleinfra.in, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

